



PERISUR
MR. TECHO

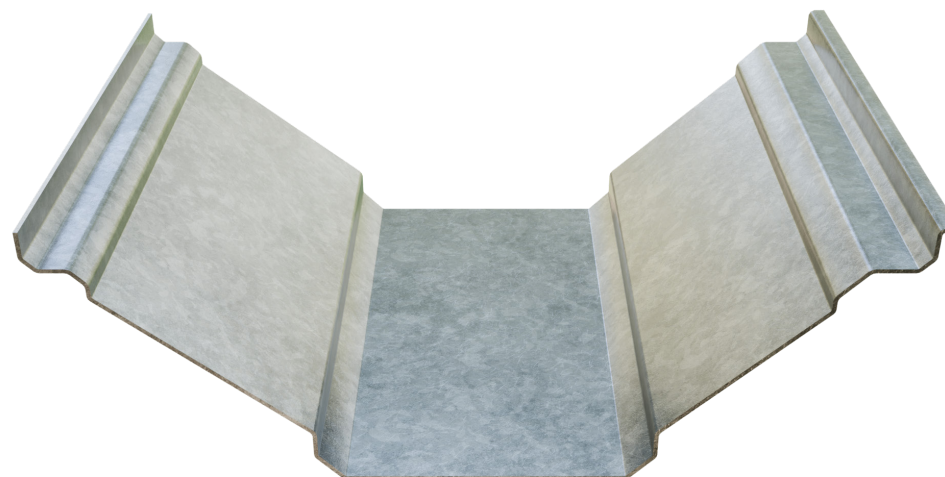

R-66

GEOMETRÍA

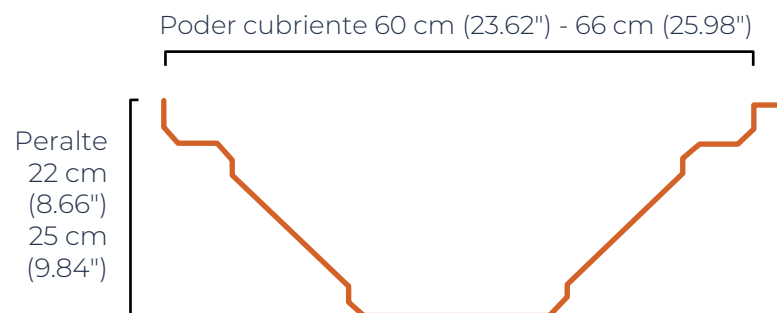

PROPIEDADES DE LA SECCIÓN

Calibre	kg / ml	Poder cubrient e	Módulo de seccióncm ³	Claro máxim o
24	4.06	66	30.8	9.3
24	4.06	65	31.8	9.53
24	4.06	64	32.7	9.75
24	4.06	63	33.6	9.96
24	4.06	62	34.4	10.16
24	4.06	61	35.2	10.35
P/Vel de viento de 160 km/hr				
24	4.06	66	30.8	6.4
24	4.06	65	31.8	6.5
24	4.06	64	32.7	6.7
24	4.06	63	33.6	6.85
24	4.06	62	34.4	6.99
24	4.06	61	35.2	35.2

Es un perfil de alta resistencia estructural con sistema atornillable, fabricado a partir de un rollo de 91.5 cm (36"). Se trata de una lámina flexible y versátil, ideal para aplicaciones en muros, techos, casetas y otros proyectos constructivos.