


PERISUR
MR. TECHO



R-66

GEOMETRÍA

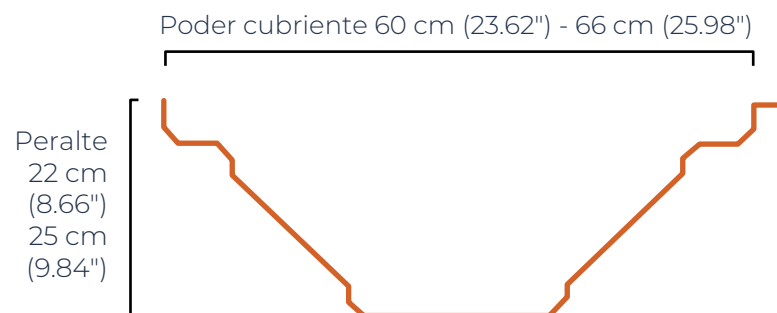

PROPIEDADES DE LA SECCIÓN

Calibre	kg / ml	Poder cubriente	Módulo de sección cm ³	Claro máximo
24	4.06	66	30.8	9.3
24	4.06	65	31.8	9.53
24	4.06	64	32.7	9.75
24	4.06	63	33.6	9.96
24	4.06	62	34.4	10.16
24	4.06	61	35.2	10.35
P/Vel de viento de 160 km/hr				
24	4.06	66	30.8	6.4
24	4.06	65	31.8	6.5
24	4.06	64	32.7	6.7
24	4.06	63	33.6	6.85
24	4.06	62	34.4	6.99
24	4.06	61	35.2	35.2

Es un perfil de alta resistencia estructural con sistema atornillable, fabricado a partir de un rollo de 91.5 cm (36"). Se trata de una lámina flexible y versátil, ideal para aplicaciones en muros, techos, casetas y otros proyectos constructivos.